

MOOD MEDIA PROFUSION iH DVD


SPECIFICATIONS

| | |
|-------------------|--|
| Operating System | Linux |
| Processor | Rockchip RK3328, ARMv8-4 |
| Memory | 2GB DDR3 |
| Storage | Up to 16GB eMMC 1 Micro SD Card slot up to 128 GB |
| Graphics | ARM Neon Advanced SIMD |
| Wireless | WiFi: 802.11 a/b/g/n/ac 2.4G / 5G |
| Network | 1x Ethernet Interface: 10/100M Base-T |
| Audio Outputs | Digital on HDMI and Analog Mono/Stereo |
| Front Panel | 3x LEDs for Power, Playback and Network 1x IR Receiver |
| Back Panel | Power Supply Input 12V-1A DC 1x 3.5mm A/V Jack 1x HDMI 2.0 1x Micro SD 1x RJ45 Ethernet Jack |
| Right Panel | 2x USB 2.0 Host Controller Ports |
| Power Adapter | External 100-240VAC Input - 12V-1A DC Output |
| Chassis | ABS, ventilated |
| Dimensions | 110 [W] x 107 [D] x 26.5 [H] mm |
| Temperature | Operating 0°C - 40°C Storage -20°C - 45°C |
| Relative Humidity | 0%-95% (non-condensing) |
| Net Weight | Player: 0.22 pounds/100 grams Power Adapter: 0.18 pounds/82 grams |
| Certifications | FCC, CE, cTUVus, CB Scheme, CCC |


Front Panel



Back Panel

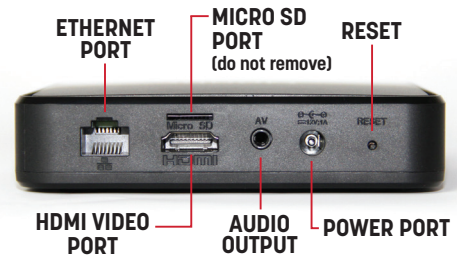

Right Panel

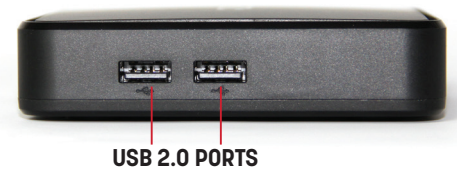

Top



Bottom



GP60NB50



GP60NS50

TECHNICAL SPECIFICATIONS

| Type | Portable DVD Rewriter | |
|----------------------|---|--|
| Transfer Rates-Write | DVD-R | 2x CLV, 4x PCAV, 8x CAV |
| | DVD-R DL | 2x CLV, 4x PCAV, 6x PCAV |
| | DVD-RW | 2x CLV, 4x, 6x ZCLV |
| | DVD-RAM | 2x, 3x ZCLV, 5x PCAV (Ver.2.2) (12x Media: Not Support) |
| | M-DISC | 4x |
| | DVD+R | 2.4x CLV, 4x PCAV, 8x CAV |
| | DVD+R DL | 2.4x CLV, 4x PCAV, 6x PCAV |
| | DVD+RW | 2.4x, 3.3x CLV, 4x ZCLV, 8x ZCLV (8x Speed disc: 3.3x CLV, 8x ZCLV) |
| | CD-R | 10x CLV, 16x PCAV, 24x CAV |
| CD-RW | 4x, 10x CLV, 16x ZCLV, 24x ZCLV (High Speed: 10x CLV, Ultra Speed: 24x ZCLV, Ultra Speed plus: 24x ZCLV) | |
| Transfer Rates-Read | DVD-R/RW/ROM | 8x/8x/8x max |
| | DVD-R DL | 8x max |
| | DVD-RAM (Ver.2.2) | 5x max |
| | M-DISC | 8x |
| | DVD-Video (CSS Compliant Disk) | 4x max (Single/Dual layer) |
| | DVD+R/+RW | 8x/8x max |
| | DVD+R/RW/ROM | 24x/24x/24x max |
| | CD-DA (DAE) | 24x max |
| Access Time | DVD-ROM | 167 ms typ |
| | DVD-RAM (Ver.2.2) | 203 ms typ |
| | CD-ROM | 139 ms typ |
| Sustained Rate | DVD-ROM | 11.08 Mbytes/s (8x) max |
| | CD-ROM | 3,600 kB/s (24x) max |
| Burst Transfer Rate | USB High-Speed | 480 Mbps (60 Mbyte/s) |
| | USB Full-Speed | 12 Mbps (1.5 Mbyte/s) |
| Buffer Size | 0.75MB Under-run prevention function embedded | |
| Host Interface | External (Host) | USB 2.0 (480Mbps/s) |
| Operating Systems | Windows 7, Windows Vista™, Windows XP, Mac OS® X | |
| Compliance | Safety UL | TUV, SEMKO, CB & IEC60825-1 Report, FDA, GOST, NOM, CSA |
| | EMC/EMI | CE Marking, C-Tick Mark, Korean EMC(KCC), Taiwan EMC(BSMI), VCCI, FCC |
| | Laser Safety | Class 1 laser product comply with DHHS rules 21 CFR Subchapter J Class 1 laser product to EN60825-1/IEC 60825-1 |
| Dimensions | 5.67" x 5.41" x 0.55" | 144 x 137.5 x 14mm |
| Weight | 0.44 lbs | 200g |
| UPC | GP60NB50 | 058231309447 |
| | GP60NS50 | 058231309676 |